



INCREASED SPECIFICATION IMPROVING SAFETY AND PERFORMANCE

Each year, hundreds of recreational craft come under distress in open, coastal and inland waters. Among the most common incidents are storm, fire, collision or rogue wave. Therefore, it is essential you equip your boat or yacht to ensure the safety of all on board. Survitec Group has created the most advanced specification Crewsaver Liferaft yet.

- The best blend of high performance and value for the money
- ISO9650-1 models have Lloyds Class ISO approval and insulated floor suitable for voyages farther from land
- 12-year fabric and seam warranty (subject to regular service inspection)
- Extended service period of 3 years, reducing your on-going costs
- Two packaging options: a sleek, weather-resistant valise or a tough, lightweight low profile container



NEW!

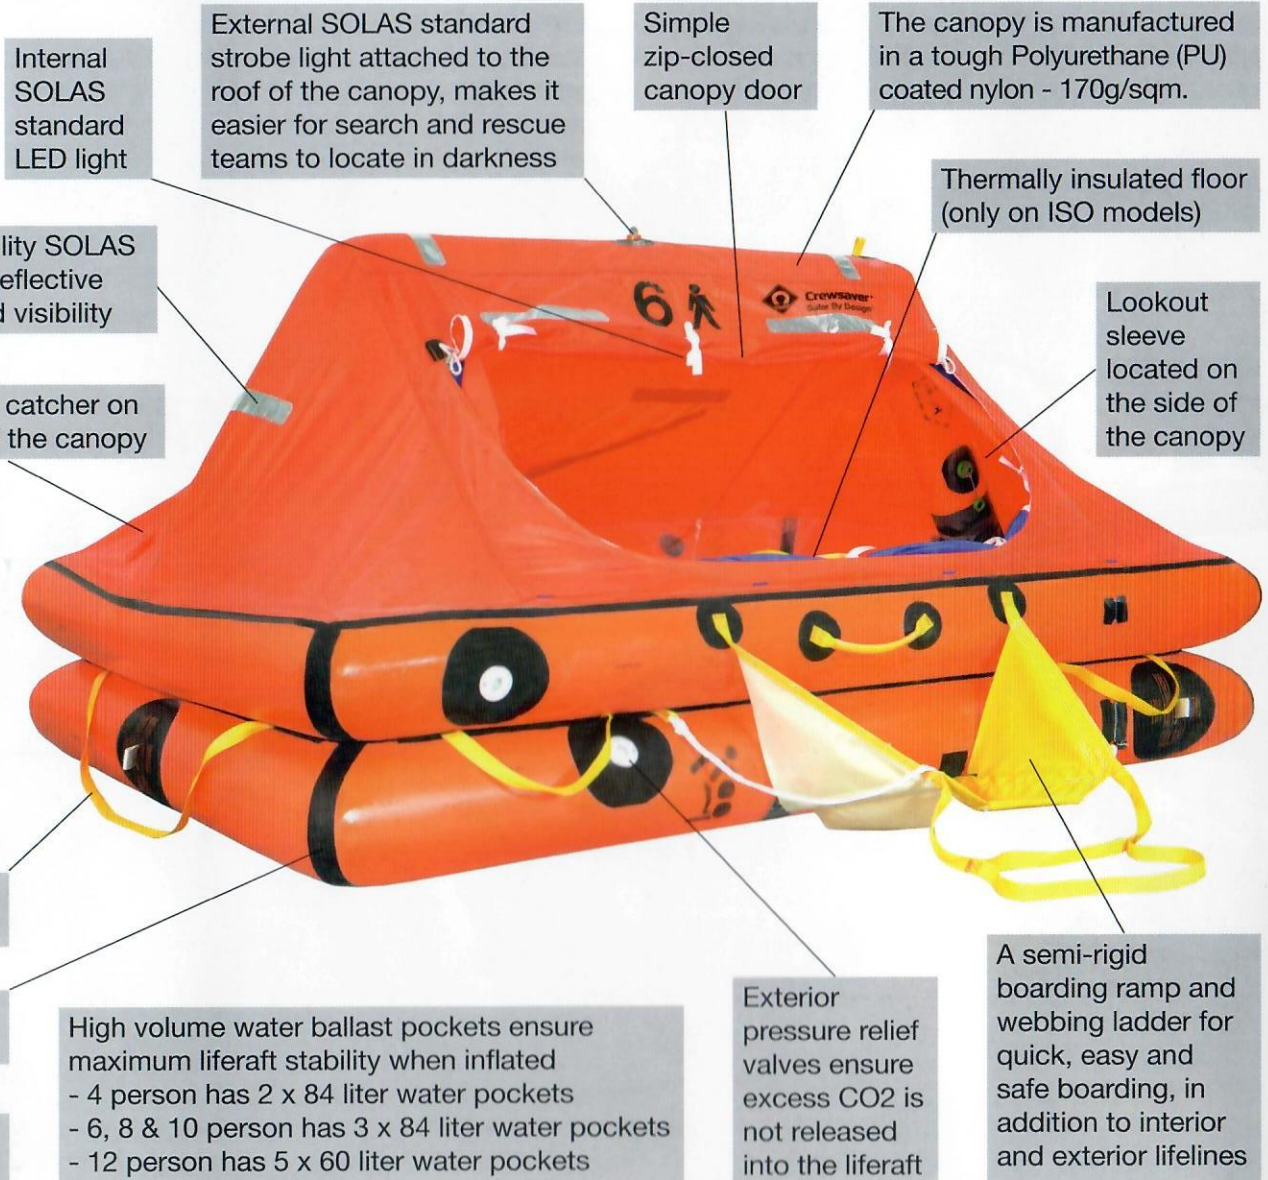

Internal SOLAS standard LED light

External SOLAS standard strobe light attached to the roof of the canopy, makes it easier for search and rescue teams to locate in darkness

Simple zip-closed canopy door

The canopy is manufactured in a tough Polyurethane (PU) coated nylon - 170g/sqm.

High visibility SOLAS standard reflective tape to aid visibility

Thermally insulated floor (only on ISO models)

Rainwater catcher on the rear of the canopy

Lookout sleeve located on the side of the canopy

Interior and exterior lifelines help occupants stabilize themselves in heavy seas

PU tubes with taped corners to aid longevity

High volume water ballast pockets ensure maximum liferaft stability when inflated

- 4 person has 2 x 84 liter water pockets
- 6, 8 & 10 person has 3 x 84 liter water pockets
- 12 person has 5 x 60 liter water pockets

Easy to locate righting lines in case of accidental capsizing

Exterior pressure relief valves ensure excess CO2 is not released into the liferaft

A semi-rigid boarding ramp and webbing ladder for quick, easy and safe boarding, in addition to interior and exterior lifelines

CREWSAVER RECREATIONAL LIFERAFT OPTIONS			
EQUIPMENT	COASTAL	ISO9650-1 Less Than 24 Hours	ISO9650-1 Greater Than 24 Hours
Floating anchor	1	1	1
Drinking water/person	-	-	1.5 liters
Rescue quoit and line	1	1	1
Repair kit	1	1	1
Sponges	1	2	2
Thermal protective aid	-	-	2
Bellows	2	1	1
Food rations per person	-	-	10,000kj
Parachute rockets	-	2	2
Hand flares	-	3	6
Use and survival instructions manual	-	1	1
Distress signal table	-	1	1
Water-tight torch with spare batteries and bulb	-	1	2
Heliograph	1	1	1
Signalling whistle	1	1	1
Floating knife	1	1	1
First aid kit	-	-	1
Anti-seasickness tablets/person	-	6	6
Paddles	2	2	2

**LIFERAFT
VALISE**



**LIFERAFT
CONTAINER**



CRADLE



LIFERAFT ACCESSORIES	PRODUCT DESCRIPTION	PRODUCT #
	Stainless Steel Deck Cradle	DCR06001
Rail Mount Kit	DKI04201	

VALISE LIFERAFT CONTAINER DIMENSIONS AND SPECIFICATIONS	SIZE	MODEL / PACK	PRODUCT #	SIZE (L x W x H)					WEIGHT	
				CM			INCHES		KG	LBS
4	Coastal	95081	71	51	23	28	20	9	29.4	65
	< 24 hr	95074	71	51	23	28	20	9	31.1	69
	> 24 hr	95070	71	51	23	28	20	9	41.6	92
6	Coastal	95082	71	51	23	28	20	9	34.4	76
	< 24 hr	95075	71	51	23	28	20	9	36.2	80
	> 24 hr	95071	79	51	28	31	20	11	51.1	113
8	Coastal	95083	79	51	28	31	20	11	39.9	88
	< 24 hr	95076	79	51	28	31	20	11	41.7	92
	> 24 hr	95072	81	53	31	32	21	12	60.9	135
10	< 24 hr	95077	79	51	28	31	20	11	47.4	105
	> 24 hr	95073	81	53	31	32	21	12	70.9	157
12	< 24 hr	Call	81	53	31	32	21	12	50.5	112
	> 24 hr	N/A	N/A					-	-	-

LOW PROFILE LIFERAFT CONTAINER DIMENSIONS AND SPECIFICATIONS	SIZE	MODEL / PACK	PRODUCT #	SIZE (L x W x H)					WEIGHT	
				CM			INCHES		KG	LBS
4	Coastal	95078	81	59	23	32	23	9	34.4	76
	< 24 hr	95065	81	59	23	32	23	9	36.1	80
	> 24 hr	95060	81	59	26	32	23	10	47.8	106
6	Coastal	95079	81	59	26	32	23	10	40.8	90
	< 24 hr	95066	81	59	26	32	23	10	42.4	94
8	> 24 hr	95061	81	59	33	32	23	13	57.7	127
	Coastal	95080	81	59	26	32	23	10	46.2	102
10	< 24 hr	95067	81	59	26	32	23	10	47.8	106
	> 24 hr	95062	84	66	33	33	26	13	65.9	146
12	< 24 hr	95068	81	59	33	32	23	13	54.0	119
	> 24 hr	95063	84	66	36	33	26	14	77.0	170
12	< 24 hr	95069	81	59	33	32	23	13	57.0	126
	> 24 hr	95064	84	66	36	33	26	14	84.4	186